


APPROXIMATE RSJ WEIGHTS PM (APPROX. GUIDE ONLY)

Size	Size (D) x (B)	Weight	Web Thickness	Flange Thickness
Inch	mm	kg/m	(t) mm	(T) mm
5" x 3"	127×76	13	4	7.6
7" x 4"	178×102	19	4.8	7.9
8" x 5"	203×133	30	6.4	9.6
10" x 4"	254×102	28.3	6.3	10
10" x 6"	254×146	43	7.2	12.7
12" x 4"	305×102	32.8	6.6	10.8
12" x 5"	305×127	48.1	9	14
12" x 6"	305×165	54	7.9	13.7
14" x 7"	356×171	67.1	9.1	15.7
16" x 7"	406×178	74.2	9.5	16
18" x 6"	457×152	67.2	9	15
18" x 6"	457×152	74.2	9.6	17
18" x 6"	457×152	82.1	10.5	18.9
18" x 8"	457×191	89.3	10.5	17.7
21" x 8.5"	533×210	122	12.7	21.3

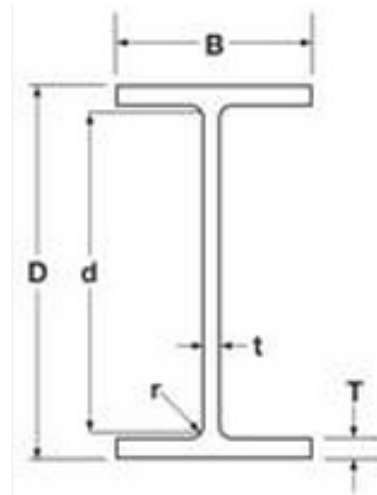

USE MULTIPLE LIFTS TO ACCOMMODATE TOTAL WEIGHT

SUMNER

MATERIAL LIFT WEIGHT CAPACITY

Description	Max Height	Lifting Capacity
2010 Material Lift	3.5 m	455 kg
2015 Material Lift	4.9 m	360 kg
2020 Material Lift	6.3 m	360 kg
2025 Material Lift	7.7 m	300 kg
2416 Material Lift	4.9 m	200 kg

GENIE

MATERIAL LIFTS WEIGHT CAPACITY

Product	Lifting height (max.)	Load capacity*
SLA™-5	2.00 m	454 kg
SLA™-10	3.49 m	454 kg
SLA™-15	4.98 m	363 kg
SLA™-20	6.46 m	363 kg
SLA™-25	7.94 m	295 kg

* 46 cm load centre