
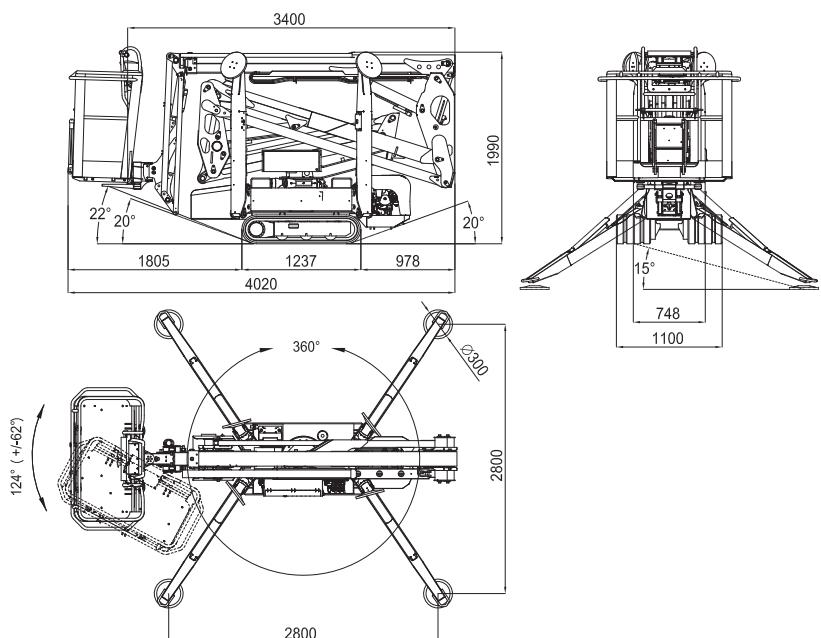


LL15.70

CAPACITY 230 KG

(2 persons 80x2=160 kg + tool box 70 kg)

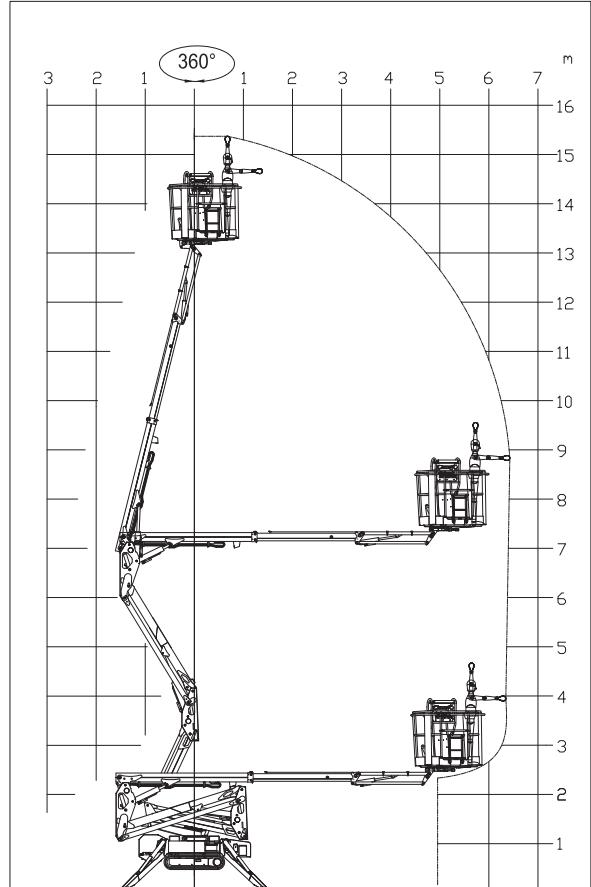

15,40 m



1.335 x 690 x h. 1.100 mm



2.800 x 2.800 mm



6,60 m



124° (+/-62°)



Automatic set up system **IIIIS** std.



4,02 m



16° / 28,7%



Remote control



3,40 m



748 - 1.100 mm



GPRS-GPS



1,99 m



1.670 daN - 2,36 daN/cm²



R.A.H.M.



Lithium-ion battery pack

3,6 kWh

Optional

PERFORMANCE **IIIIS**
**PETROL ENGINE**

Brand	HONDA
Type	GX390
Pistons no. and displacement	single-cylinder 389 cm ³
Max gross power	11,7HP - 8,7 kW @ 3600 rpm (GX390)
Electrical start.....	12 volt

DIESEL ENGINE

Brand	HATZ
Type	1B40 - HD Autorev
Pistons no. and displacement	single-cylinder 462 cm ³
Max gross power	10 HP - 7,5 kW @ 3600 rpm
Electrical start.....	12 volt

LITHIUM-ION SYSTEM

Lithium-ion powered	3,6 KWh
Onboard battery charger	220V 50Hz or 110V 50Hz
Autonomy	4-5 h
Recharge time on flat batteries	4 h (indicative)
Recharge time to 80% on flat batteries.	2 h (indicative)

HYDRAULIC PUMPS

Electric motor	no. 2 gear pumps
----------------------	------------------

TRACKED UNDERCARRIAGE

Track tensioner	grease-filled
Rollers no. per side	3 + slide

Translation speed with 2nd auto2speed:

- thermal engine	1,4 - 2,6 km/h
- lithium system.....	0,4 - 0,8 - 1,6 km/h

WEIGHT MACHINE petrol engine.....	1940 kg
WEIGHT MACHINE diesel engine.....	1960 kg
WEIGHT MACHINE lithium system	1992 kg

MAX WIND SPEED	12,5 m/s
----------------------	----------